EXHIBIT A

OIPE JC156
APR 0 7 2003
PATENT & TRADEMARK OFFICE

Drive Method (1)

FIG. 4A Drive Wave Form

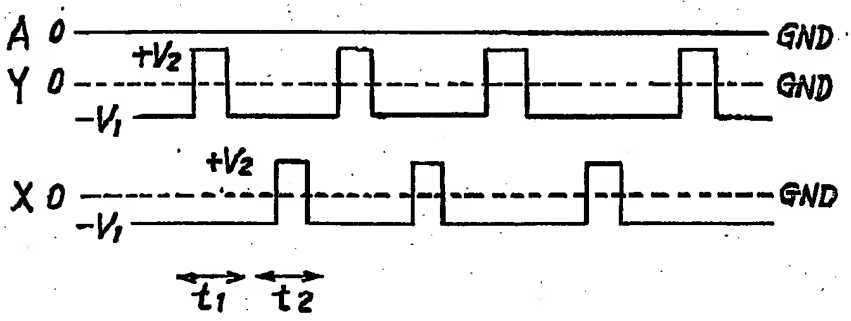

FIG. 4B Drive Circuit

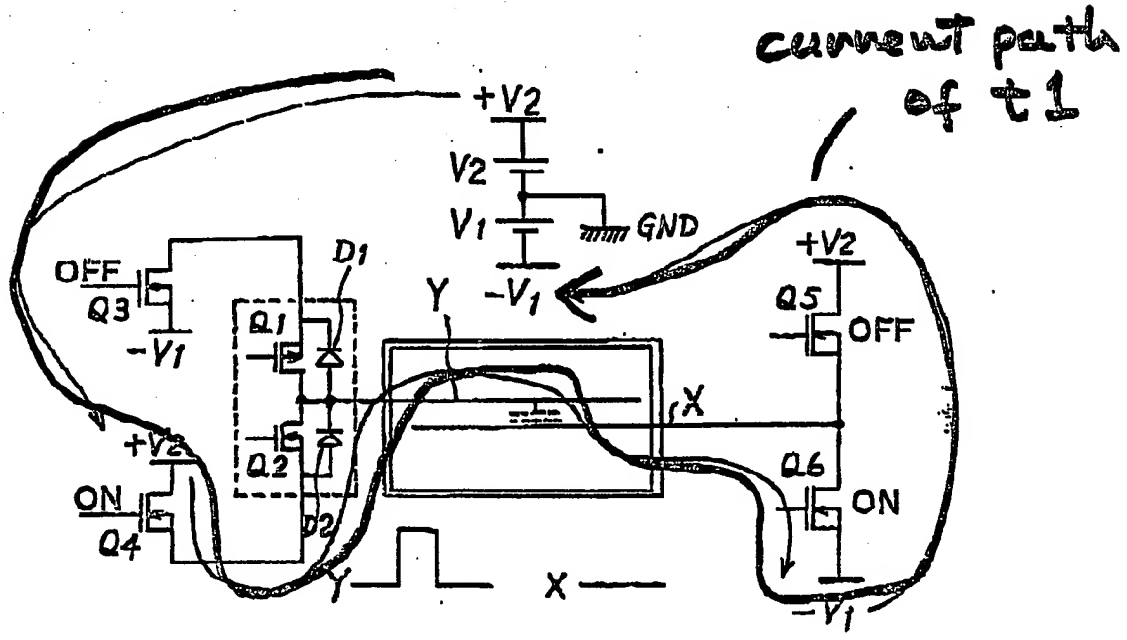

t1 : X = -V1, Y = +V2 ; current path in Fig. 4B

t2 : X = +V2, Y = -V1 current path in Fig. 5B

OIPE JC156
APR 07 2003
PATENT & TRADEMARK OFFICE

Drive Method (2)

FIG. 5A Drive Wave Form

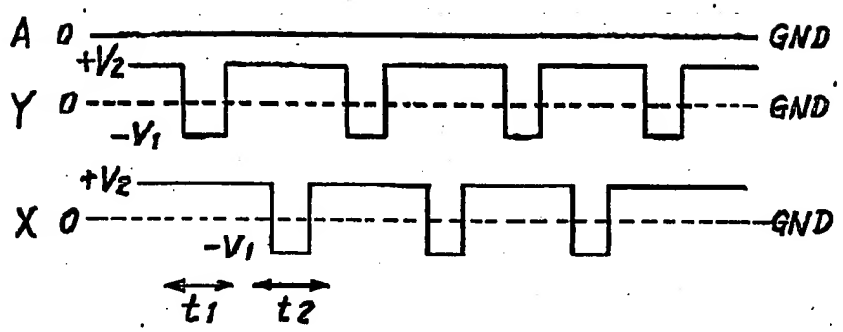

FIG. 5B Drive Circuit

current path of t1

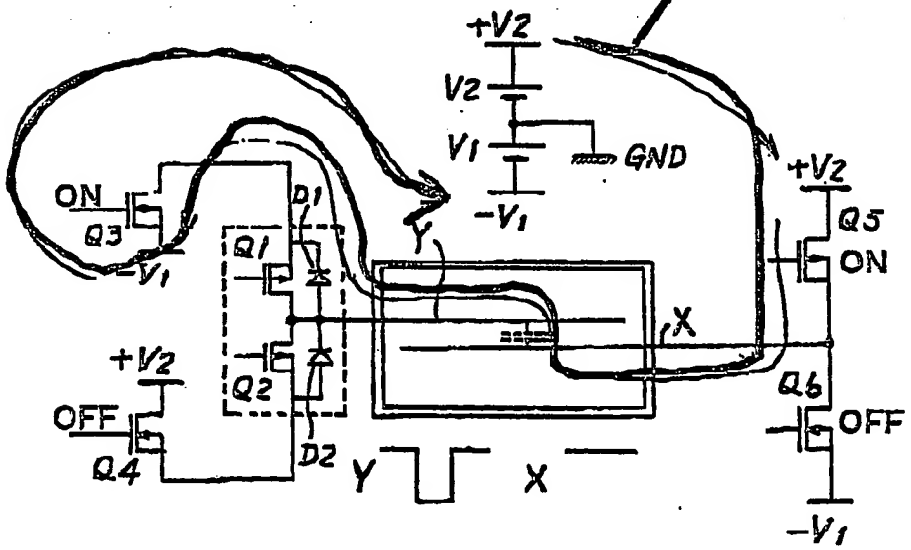

t1: X = +V2 , Y = -V1 Current path in Fig. 5B

t2: X = -V1 , Y = +V2 current path in Fig. 4B

OIPE
APR 0 7 2003
PATENT & TRADEMARK OFFICE

Drive Method (3)

FIG. 6A Drive Wave Form

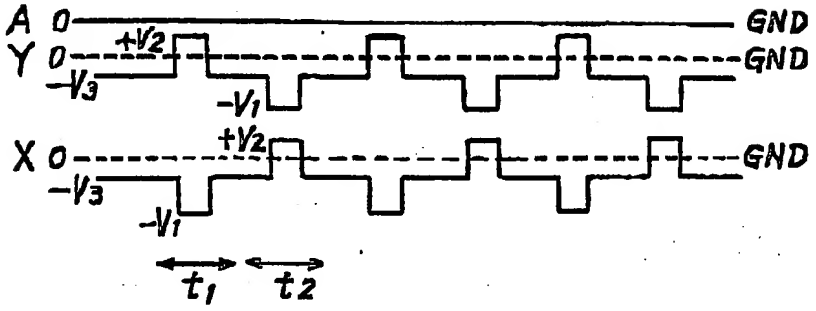

FIG. 6B Drive Circuit

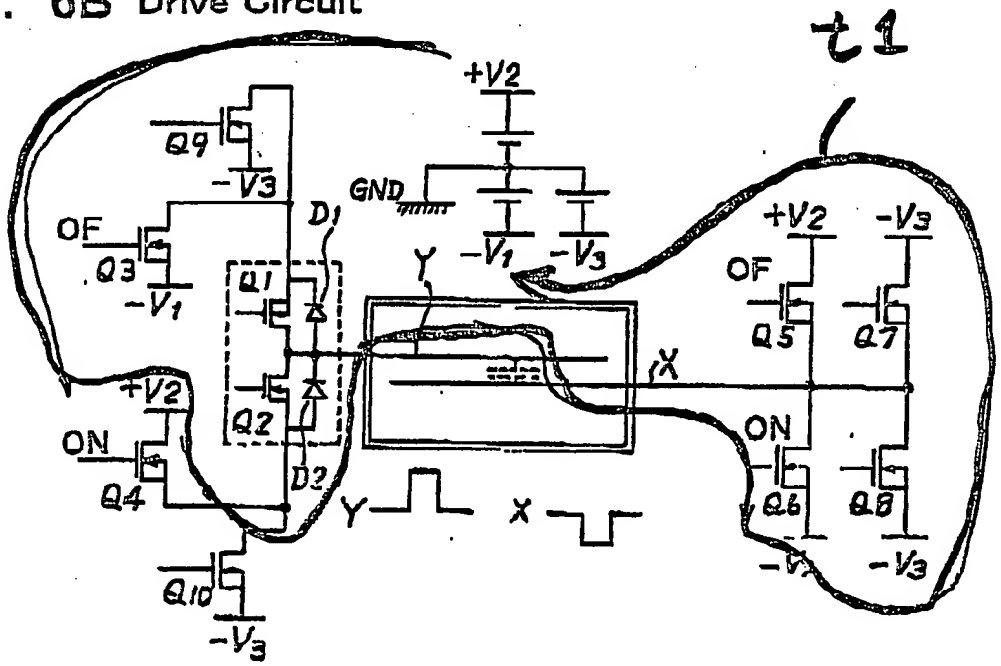

OIPE JC166
APR 07 2003
PATENT & TRADEMARK OFFICE

Drive Method (4)

FIG. 7A Drive Wave Form

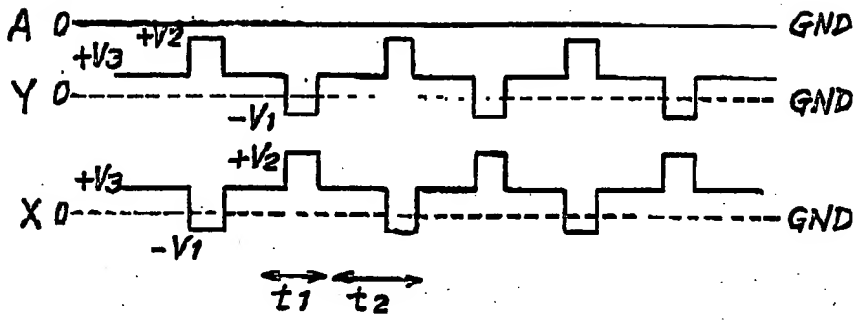
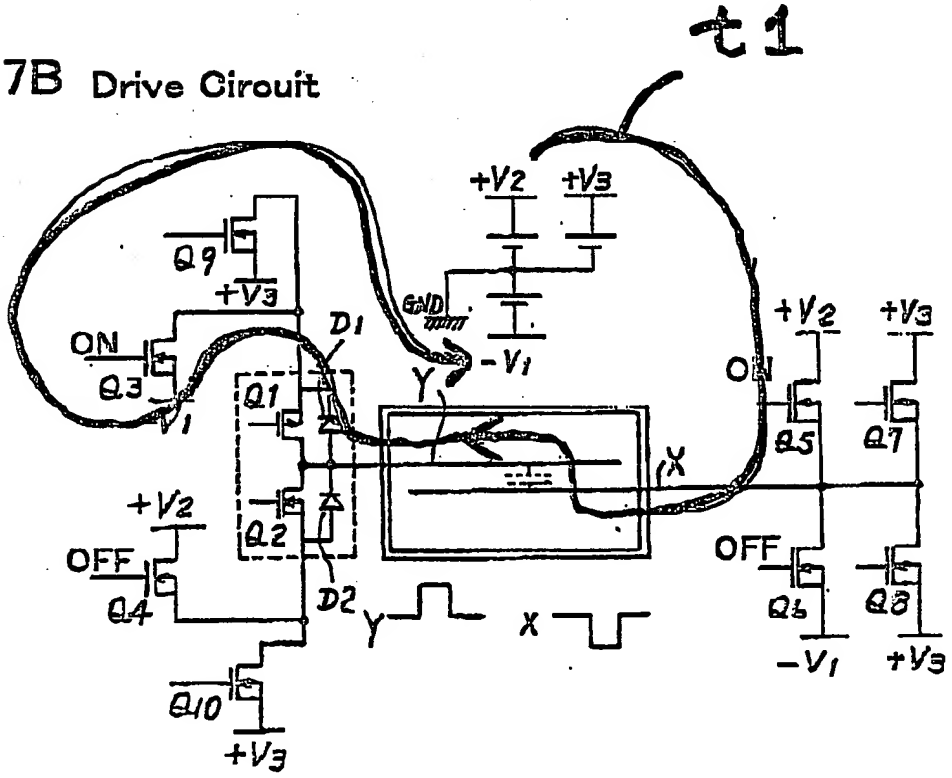
FIG. 7B Drive Cirouit